


Spare Rolls



Used in grain milling, oilseed flaking, animal feed cracking, food processing, brewing, etc., double-layer centrifugal cast with selected multiple alloys and verified by spectrum, computer controlled smelting assuring uniform hardness of outer layer surface, precise machining and dynamical balance ensure excellent performance in various applications

Body length to 2000 mm with diameter to 800 mm
Surface hardness 66 –78 HS (480-530 HB)
Chilled depth 15-25 mm
Surface finish: smooth, fluted, sand-blasted

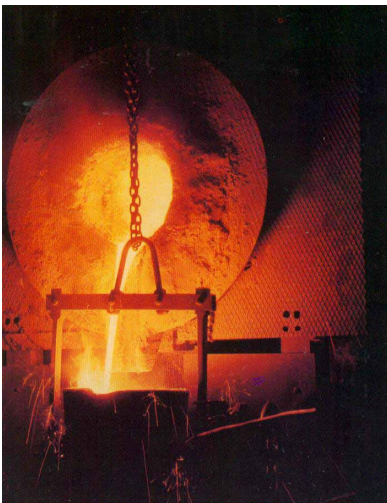